


PHILIPS

Telecaster BA Series

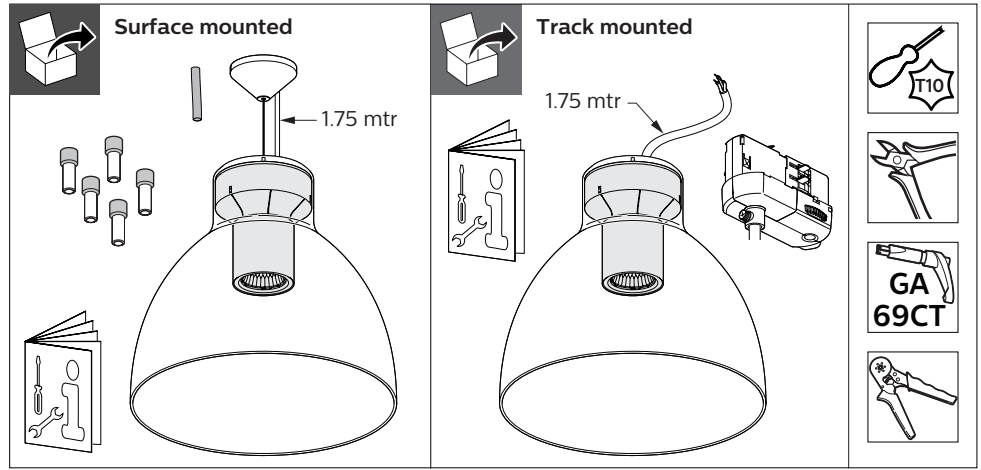

220V
240V

50Hz
60Hz



IK02



IP20



Max. 35°C
Min. 10°C


GLOW WIRE
650°C



	Lumen (Lm)	CCT (K)	Driver	P (W)	Through-wiring	
TC BA S LED22S/XXX WR XX	2200	830/840	PSU/PSD	21.0	•	2.2
TC BA T LED22S/XXX WR XX			PSU		-	
TC BA S LED27S/XXX WB XX	2700	830/840	PSU/PSD	24.5	•	1.7
TC BA T LED27S/XXX WB XX			PSU		-	
TC BA S LED22S/XXX VWB CL	2200	830/840	PSU/PSD	21.0	•	1.7
TC BA T LED22S/XXX VWB CL			PSU		-	
TC BA X LEDXXS/XXX WR XX					•	2.2
TC BA X LEDXXS/XXX WB XX	on demand	on demand	PSU/PSD	on demand	•	1.7
TC BA X LEDXXS/XXX VWB CL					•	1.7

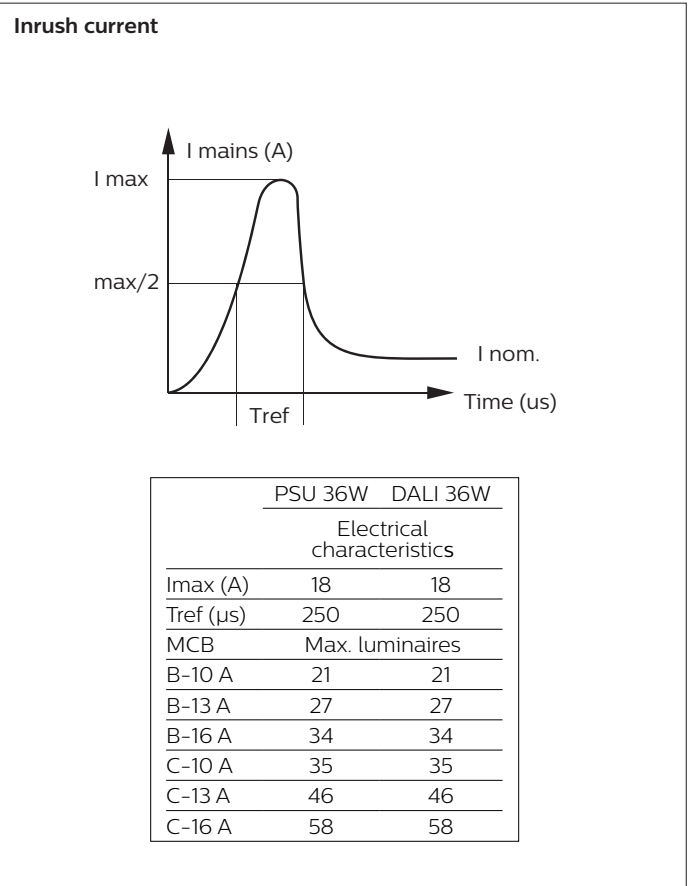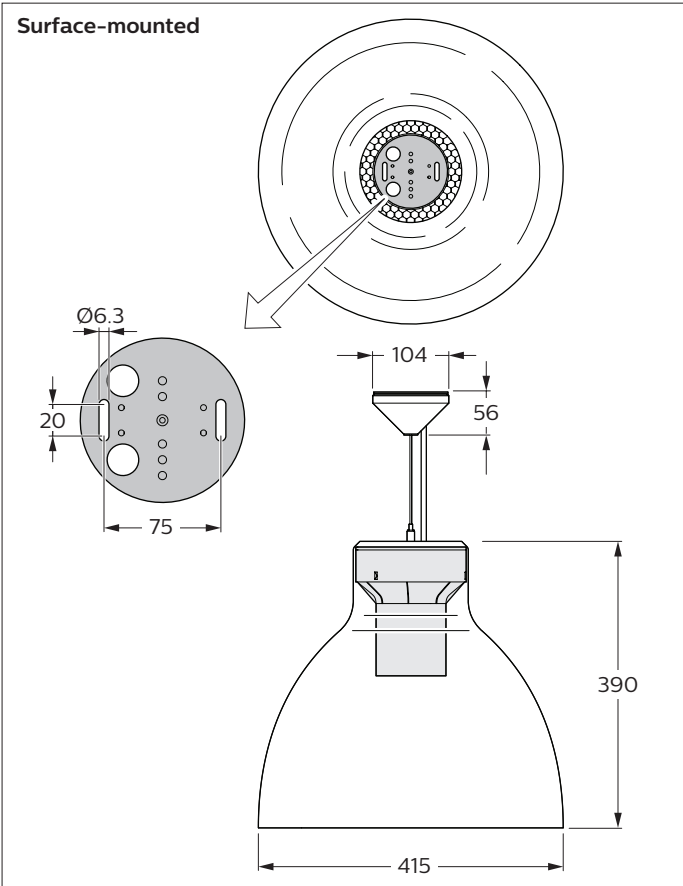

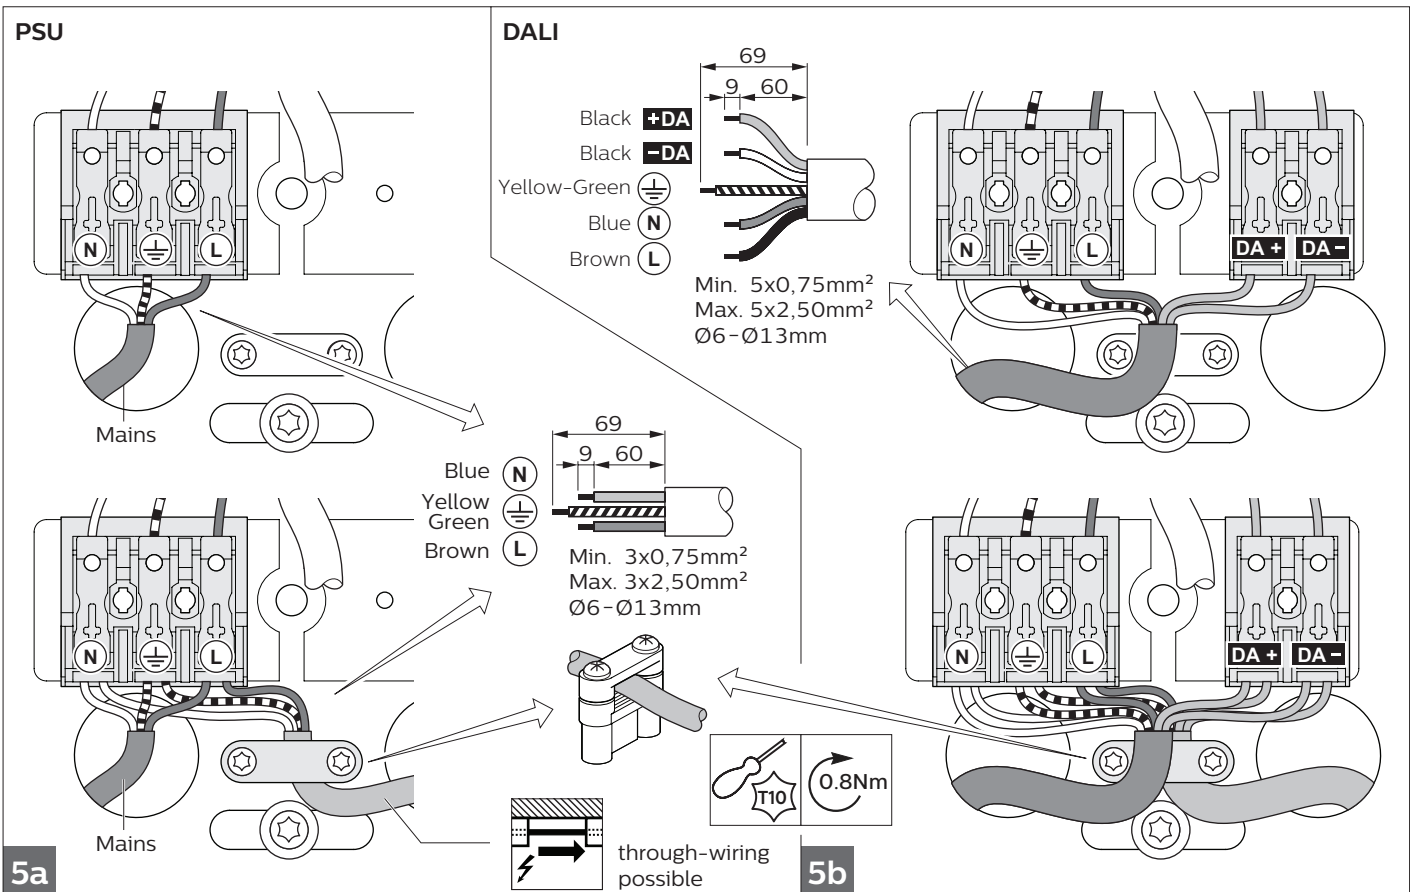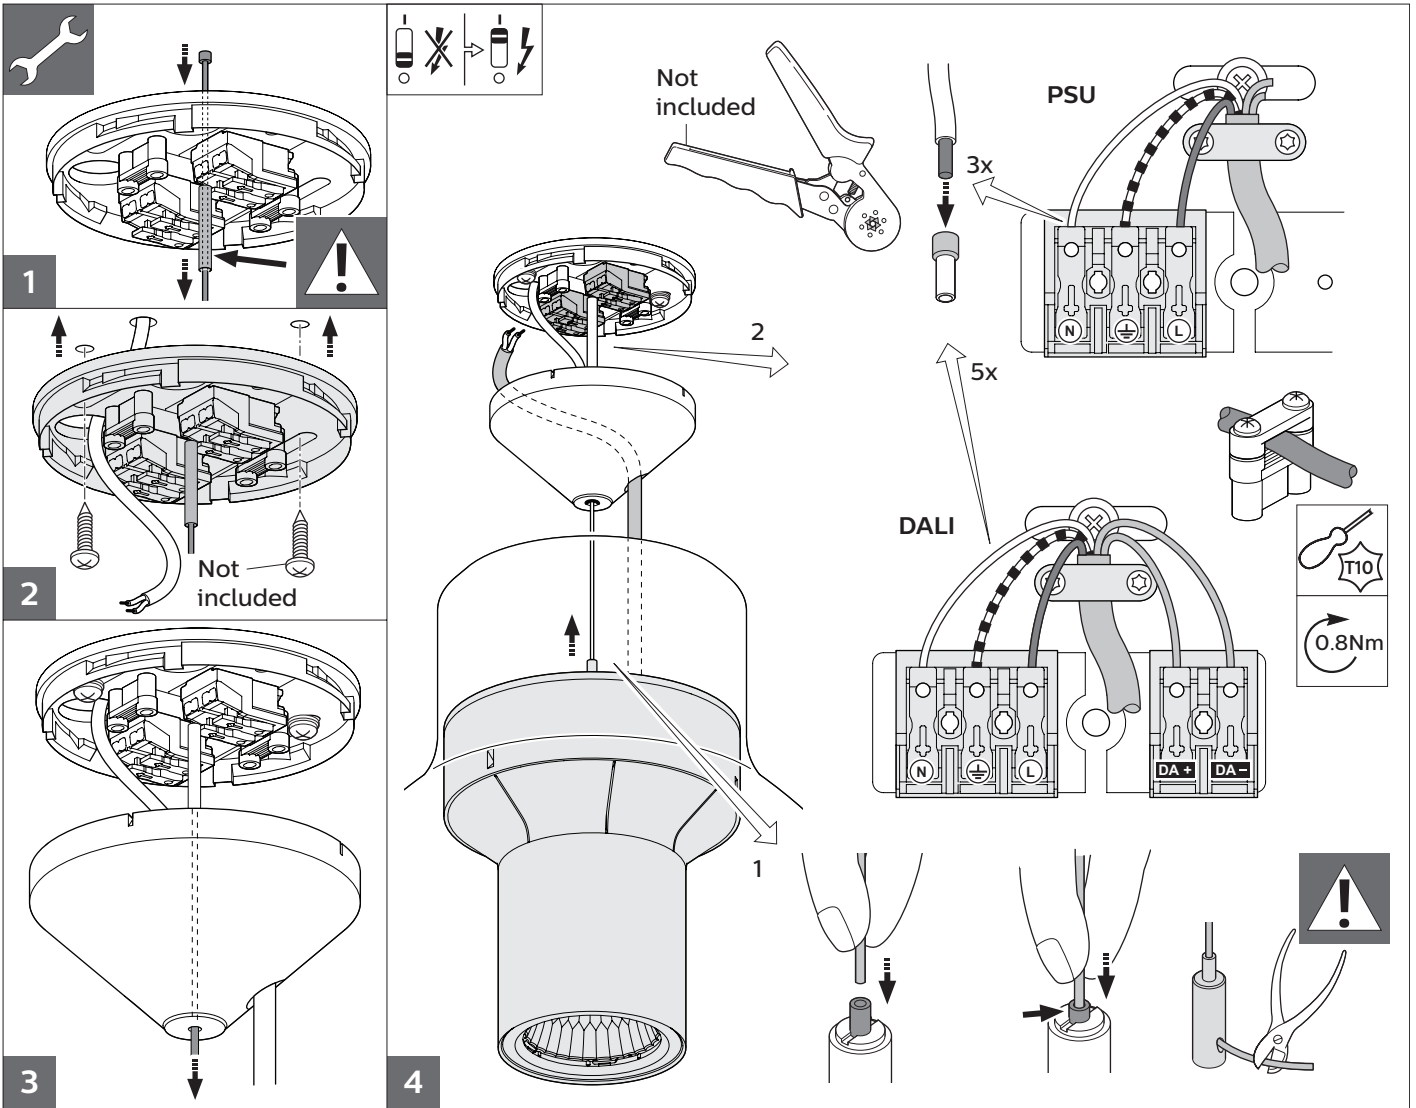


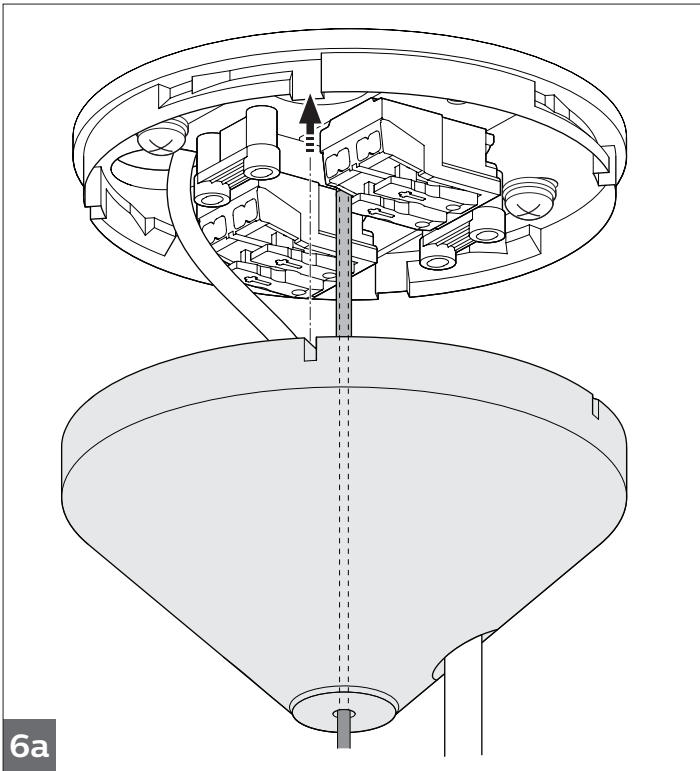


Track version assemble

GLOBAL Trac connecting diagrams.


This product is designed for GLOBAL Trac. Please contact relevant product specialist for compatibility with other track types.

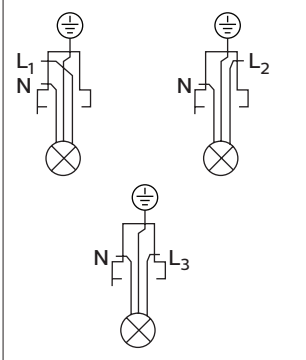





A GLOBAL Trac Pro PSU GA69 230V, 6A


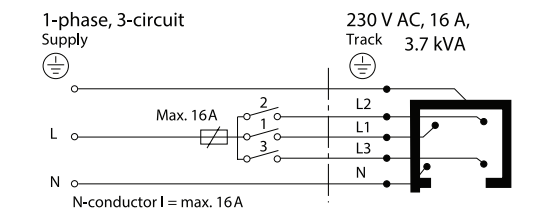


B 3-phase, 3-circuit Supply

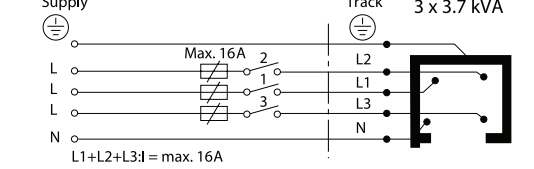

C 3-phase, 3-phase Supply

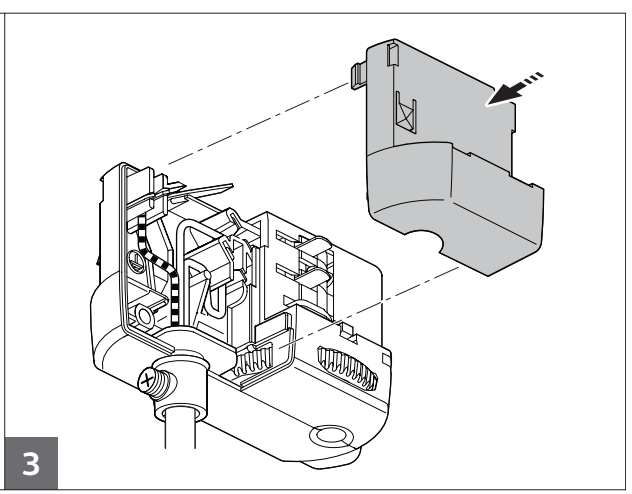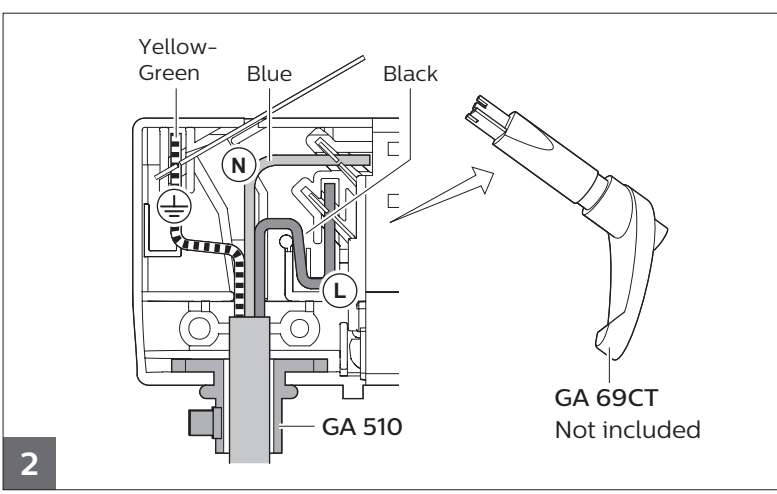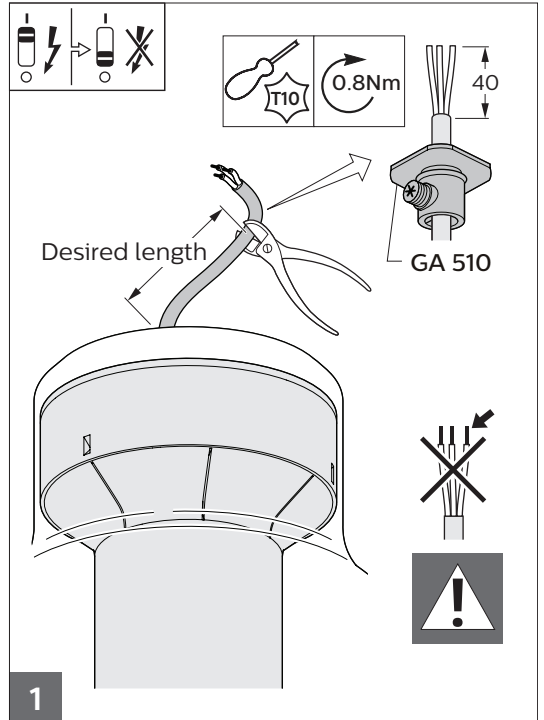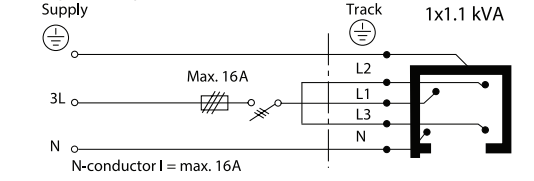

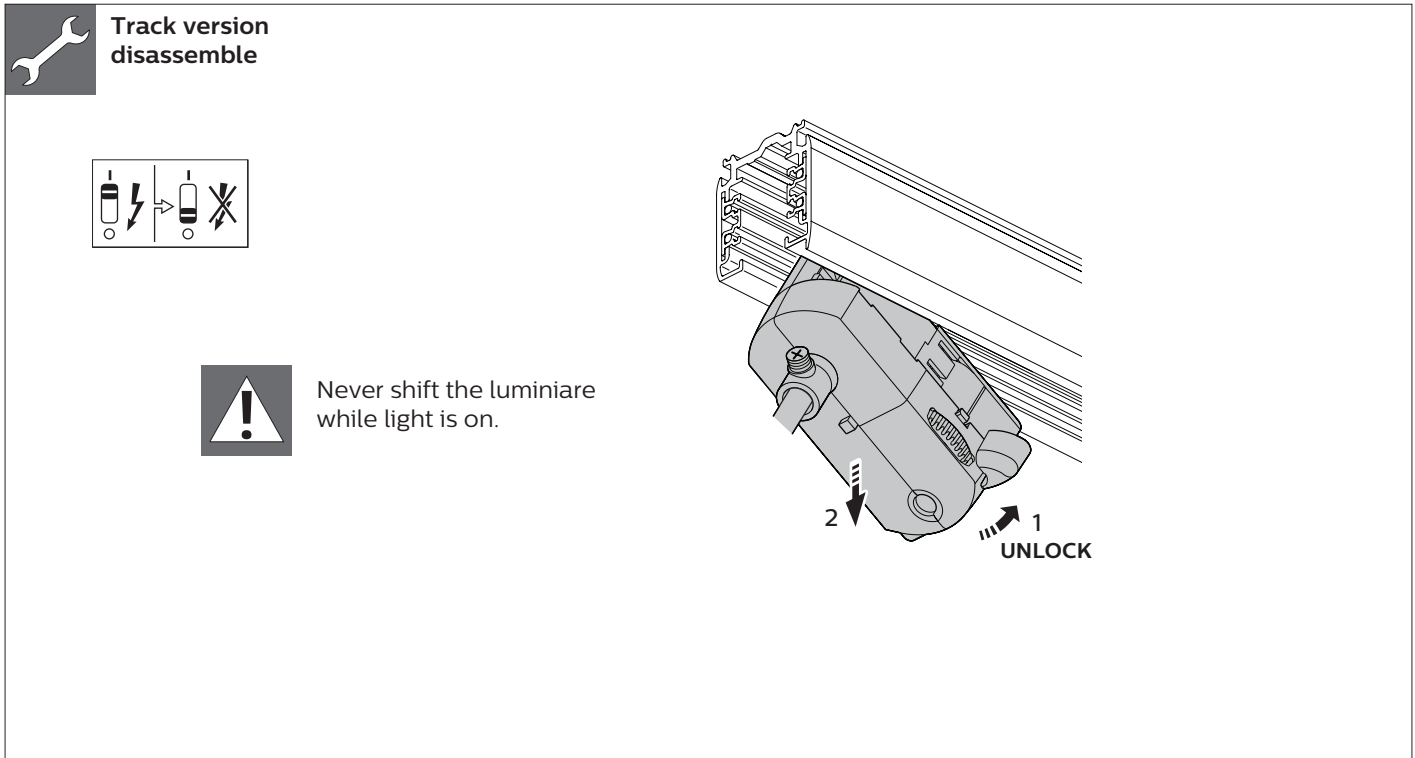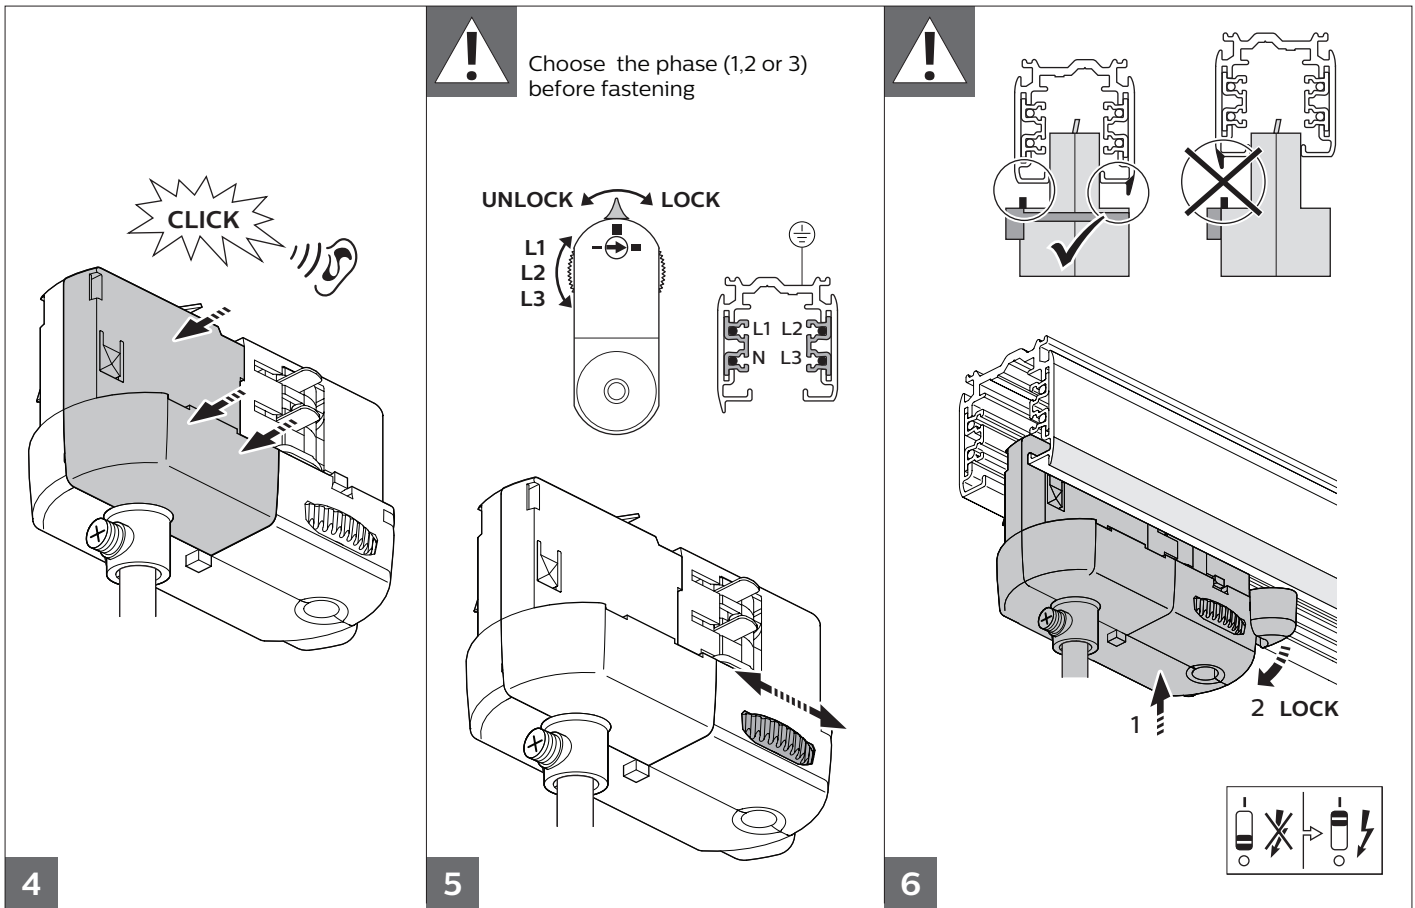

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- This luminaire is not suitable for use as emergency lighting.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Clean with dry cloth.

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES