


PHILIPS

TC PM Highbay Series

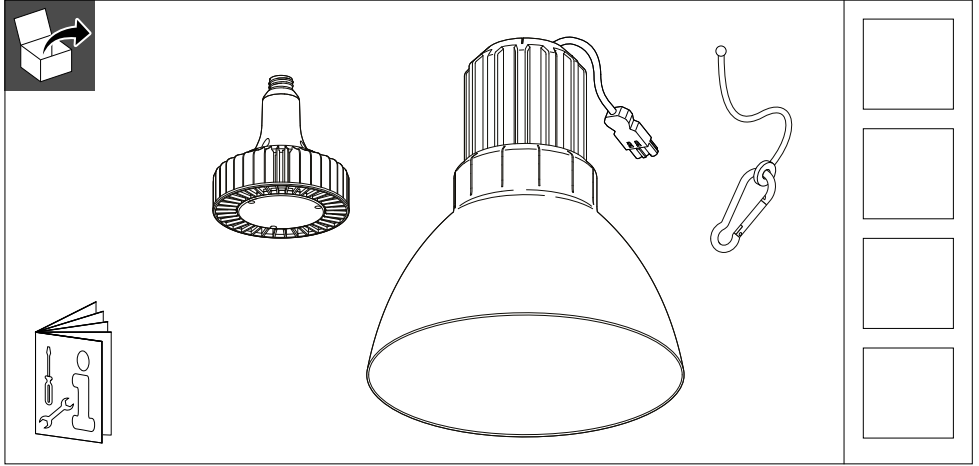

220V
240V

50Hz
60Hz



LIFE
L70B50
50K hrs




IK05



Max.
40 °C
Min.
0 °C







GLOW
WIRE
750 °C


IP20




	Lumen (lm)	P (W)	
TC PM LED200S/830-E40 70D CL-WH/BK/SI			
TC PM LED200S/830-E40 130D CL-WH/BK/SI	20000	160	3.5
TC PM LED200S/840-E40 70D CL-WH/BK/SI			
TC PM LED200S/840-E40 130D CL-WH/BK/SI			

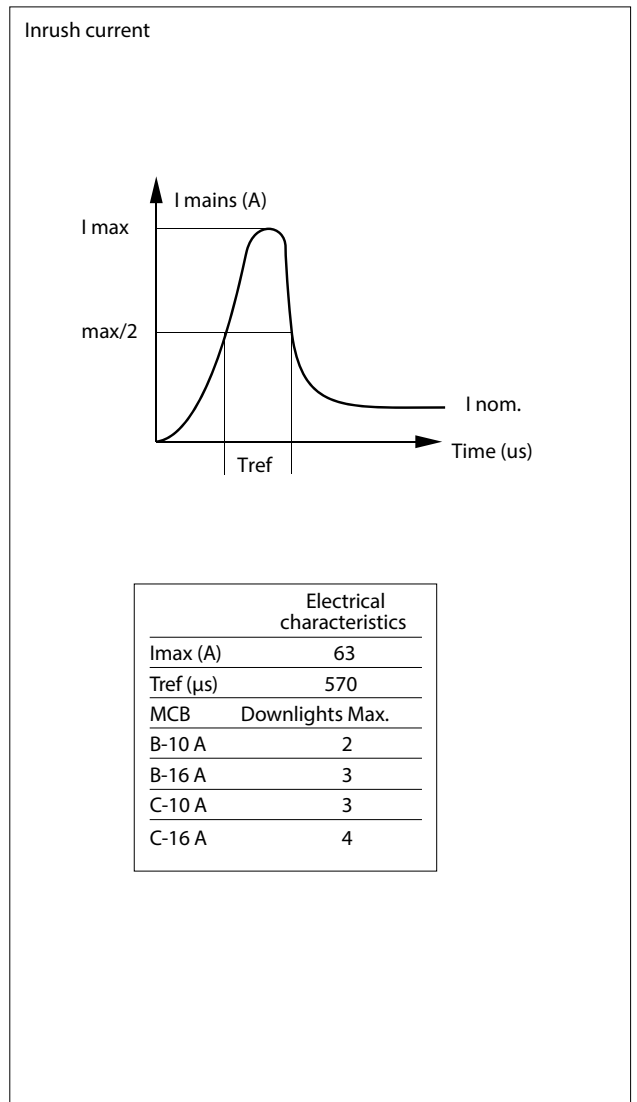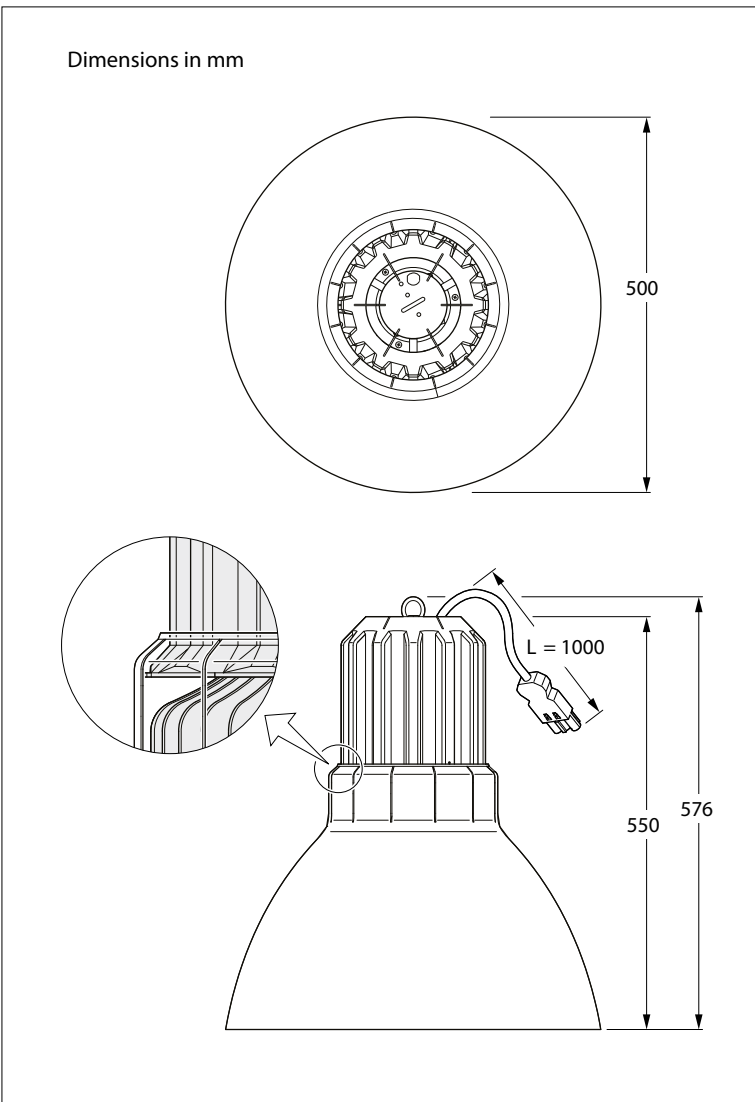

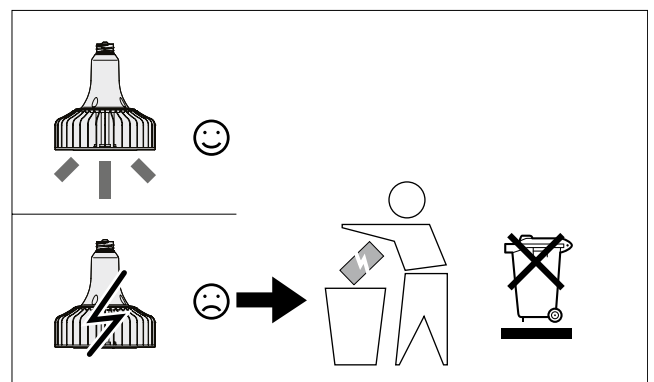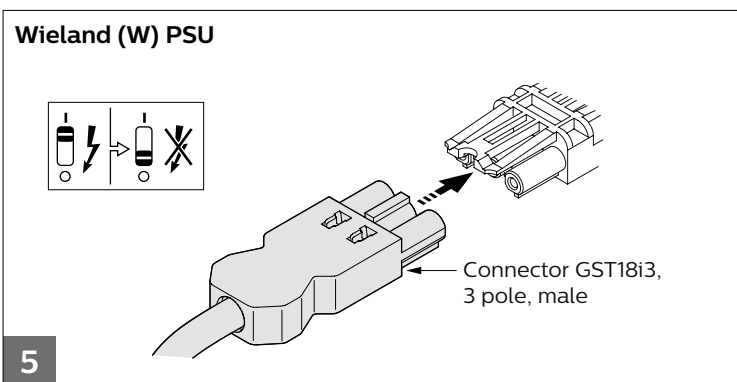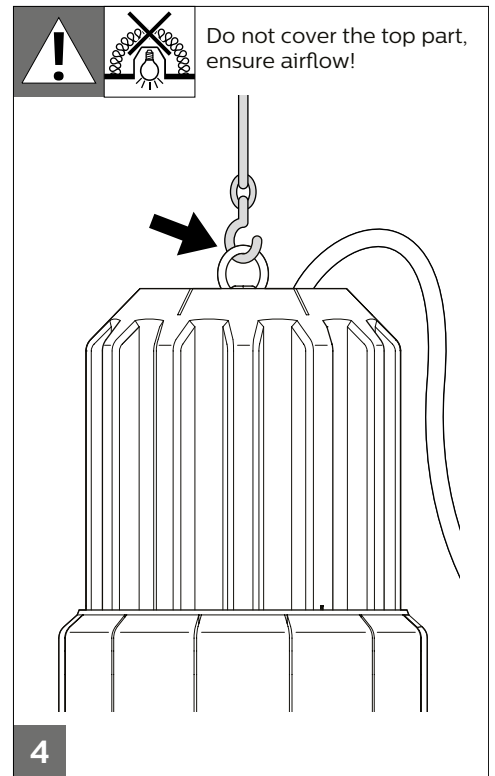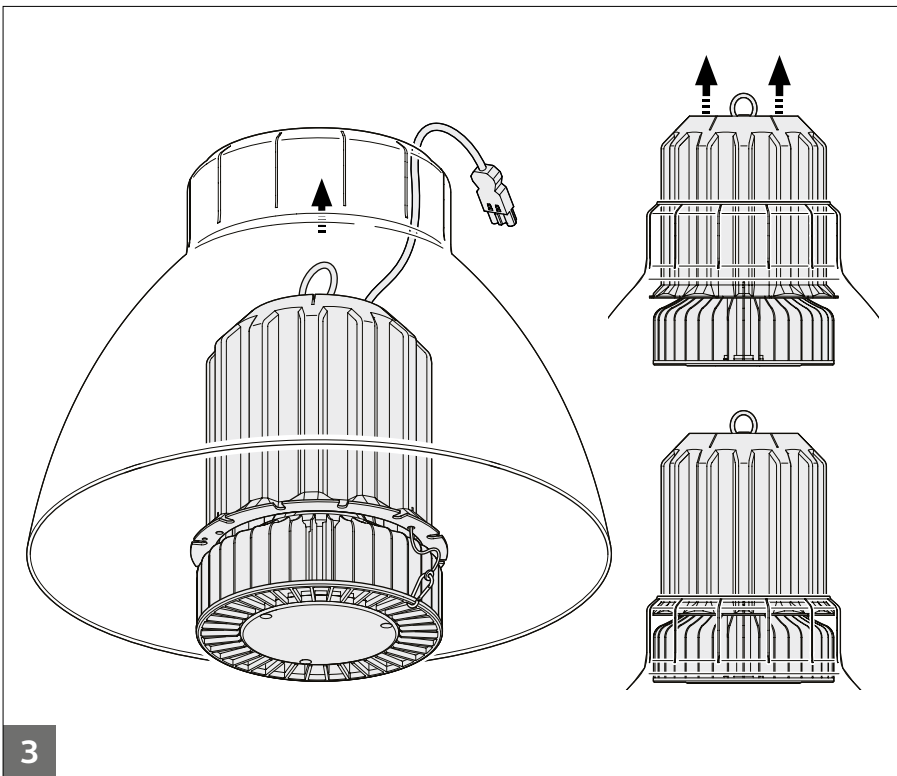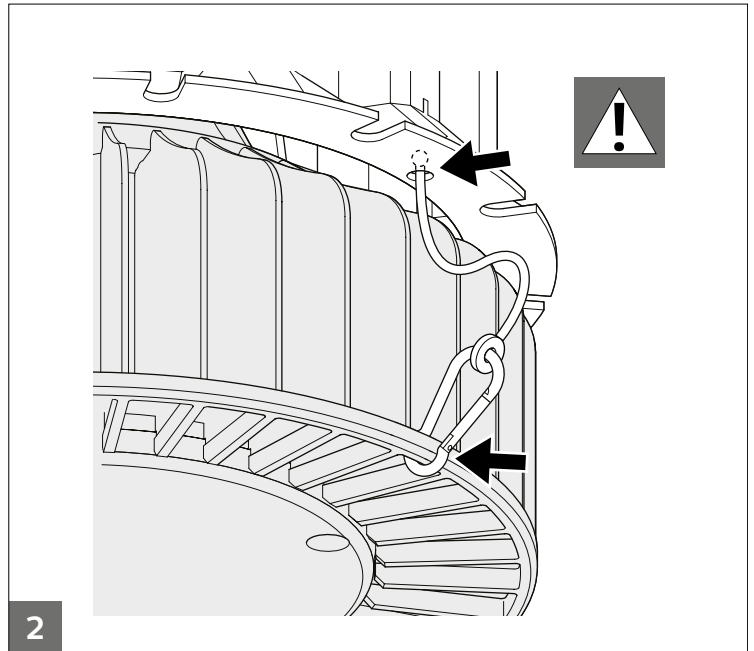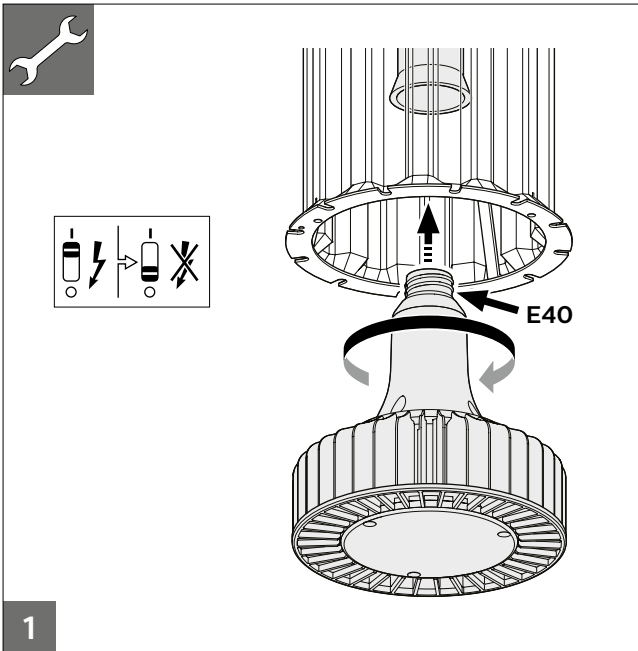

 - The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEElectrical regulations or the national requirements.
 - This luminaire is not suitable for use as emergency lighting.

 ATTENTION
 OBSERVE PRECAUTIONS
 FOR HANDLING
 ELECTROSTATIC
 SENSITIVE
 DEVICES